



# GROOVED Grooved matting

16/07/2014

## STANDARD MATTING

### FEATURES

- Non-slip surface.
- Ribbed profiles.

### ADVANTAGES

- Non-slippery
- Thermal and acoustic insulation
- Noise, vibration, and cold propagation reduction

### BENEFITS

- Safety
- Comfort
- Economy

### APPLICATIONS

Cutting pieces for vehicles step treads, shelves, or racks covers.

Cutting plates for protection of walls, columns, staircases, step stools, car trunks or vessels corridors.

Indoor installations.

[www.trelleborg.com/elastomerlaminates](http://www.trelleborg.com/elastomerlaminates)



## MECHANICAL, PHYSICAL AND CHEMICAL PROPERTIES

|                   | Measured characteristics  | Standard   | Value                 |
|-------------------|---------------------------|------------|-----------------------|
| <b>MECHANICAL</b> |                           |            |                       |
|                   | Rubber compound           |            | SBR                   |
|                   | Hardness                  | ASTM D2240 | 70 ± 5 Shore A        |
|                   | Abrasion resistance (5 N) | ISO 4649   | ≤ 250 mm <sup>3</sup> |


| PROFILE | PATTERN |
|---------|---------|
|---------|---------|



Fine triangular ribbed (MT)

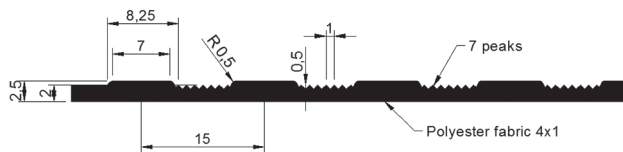

Rectangular ribbed (MR)



Wide ribbed (MG)

## DIMENSIONS

| Colour | Thickness (mm) | Width (mm) | Length (m) | Weight (kg/m <sup>2</sup> ) | Pattern |
|--------|----------------|------------|------------|-----------------------------|---------|
| ●      | 3 ± 0.3        | 1000 ± 2 % | 10 ± 2 %   | 3.6                         | MT      |
| ●      | 3 ± 0.3        | 1200 ± 2 % | 10 ± 2 %   | 3.6                         | MT      |
| ●      | 2.5 ± 0.3      | 1500 ± 2 % | 15 ± 2 %   | 3.3                         | MR      |
| ●      | 5.8 ± 0.5      | 1000 ± 2 % | 10 ± 2 %   | 6.9                         | MG      |
| ●      | 5.8 ± 0.5      | 1200 ± 2 % | 10 ± 2 %   | 6.9                         | MG      |

## IDENTIFICATION

|           |   |
|-----------|---|
| Branding  | Without.  |
| Back face | Fabric impression.  |
| Packaging | Rolled on cardboard tube Ø 80 mm.   |
| Wrapping  | Black polyethylene film.  |
| Labelling | Self-adhesive label indicating product name, dimensions, area in m <sup>2</sup> , nominal weight, and product code to allow product traceability. |