



Applications


Connection of the PERFORMER Hoses: GL AD10 H, GL AD10 T and GL AD10 P.

Advantages

- Hoses can be cut to length on site or at manufacture to suit the specific installation requirements.
- Easy to cut: no special tooling is needed as the coupling face acts as a cutting guide.
- The flange can be adjusted easily for fitting and will not deform in service.
- Quick and easy to replace.
- The couplings can be removed from a damaged hose and reused on replacement.
- A lightweight connection system.

Technical description

PERFORMER hoses fitted with BLOC END® couplings are suitable for following working pressure 10 bar (ID ≤150 mm) and 5 bar (ID >150 mm). Standardised drilling.

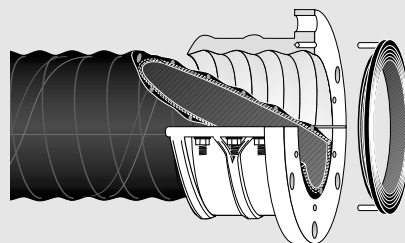

Article No.	ID hose mm	Bolts for the half-shells number	Stock item
BLOC END® drilling PN10, Complete coupling including half shells, gasket and bolts/nuts/washers			
117042	40	4	●
117043	50	4	●
117044	65	4	●
117045	80	4	●
117046	100	4	●
117047	125	4	●
117048	150	4	●
117049	200	6	●
118093	250	6	●
118095	300	6	●
Spare part-kit containing two PN10 half shells only, without gaskets and bolts			
116890	40	4	●
116891	50	4	●
116893	65	4	●
116895	80	4	●
116897	100	4	●
116899	125	4	●
116901	150	4	●
116902	200	6	●
118089	250	6	●
118091	300	6	●

Article No.	ID hose mm	Bolts for the half-shells number	Stock item
BLOC END®, drilling PN20, ASA 150, Complete coupling including half shells, gasket and bolts/nuts/washers			
117155	50	4	●
117156	65	4	1
117157	80	4	1
117158	100	4	●
117159	125	4	1
117048	150	4	1
117160	200	6	●
118094	250	6	1
118096	300	6	1
Spare part-kit containing two PN20 half shells only, without gaskets and bolts			
116892	50	4	●
116894	65	4	1
116896	80	4	1
116898	100	4	●
116900	125	4	1
116901	150	4	1
116903	200	6	●
118090	250	6	1
118092	300	6	1

Article No.	ID hose mm	Stock item
Spare part-kit containing two gaskets only. The gaskets are the same for PN10 and PN20.		
116966	40	●
116967	50	●
116968	65	●
116969	80	●
116970	100	●
116971	125	●
116972	150	●
116973	200	●
118087	250	●
118088	300	●
Bolt, including nut and washer for all dimensions of half-shells. The number of bolts required for each hose-end are: For ND40 to ND150 = 4 pcs and for ND200 to ND300 = 6 pcs. The bolts are the same for PN10 and PN20		
111322	40-300	●

● = Stock item.

1 = Non stock, min. quantity = 25 pieces